

# CHAIN HOISTS


## ILULA CHAIN BLOCKS

These units are of lightweight but robust construction, manufactured in accordance with ISO 9002 certified quality system standards.

They comply with EC Council Directive 89/37/EC Machinery, ASME B30, AS 1418.2.

### SPECIAL FEATURES

- \* Extra-thick asbestos-free friction plates.
- \* Double pawl braking system.
- \* Lipped hooks, providing extra safety.
- \* Double cover protection on brake side.
- \* Galvanized hand chain.

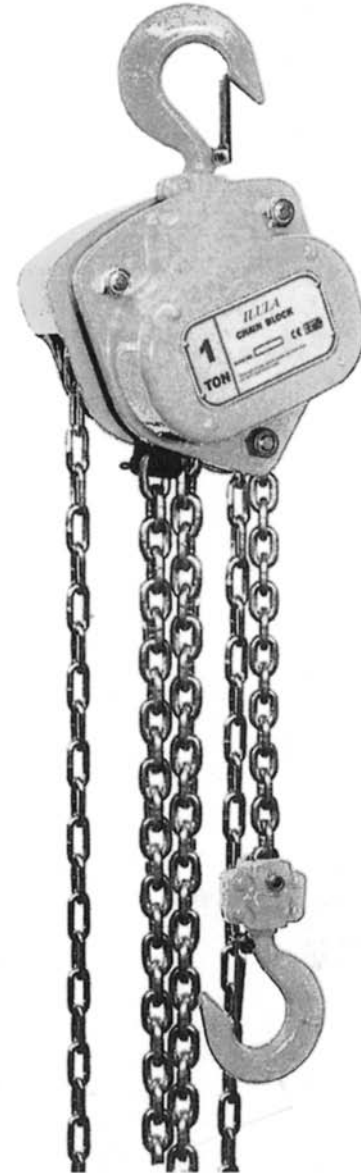

### SPECIFICATIONS

Model	Capacity (ton)	Load Chain Falls	Pulling Effort (kg)	Drawn-up Height (mm)	Weight c/w 3M pull (kg)
E005	0.5	1	23	270	8
E010	1.0	1	31	317	12
E015	1.5	1	32	399	18
E020	2.0	1	36	414	18
E030	3.0	2	34	465	25
E050	5.0	2	42	636	45
E100	10.0	4	42	798	79
E200	20.0	8	42 X 2	890	193

SEE FOLLOWING PAGE FOR PARTS LIST

# CHAIN HOISTS

