


NYLON SLINGS

NYLON LOAD LIFTING SLINGS

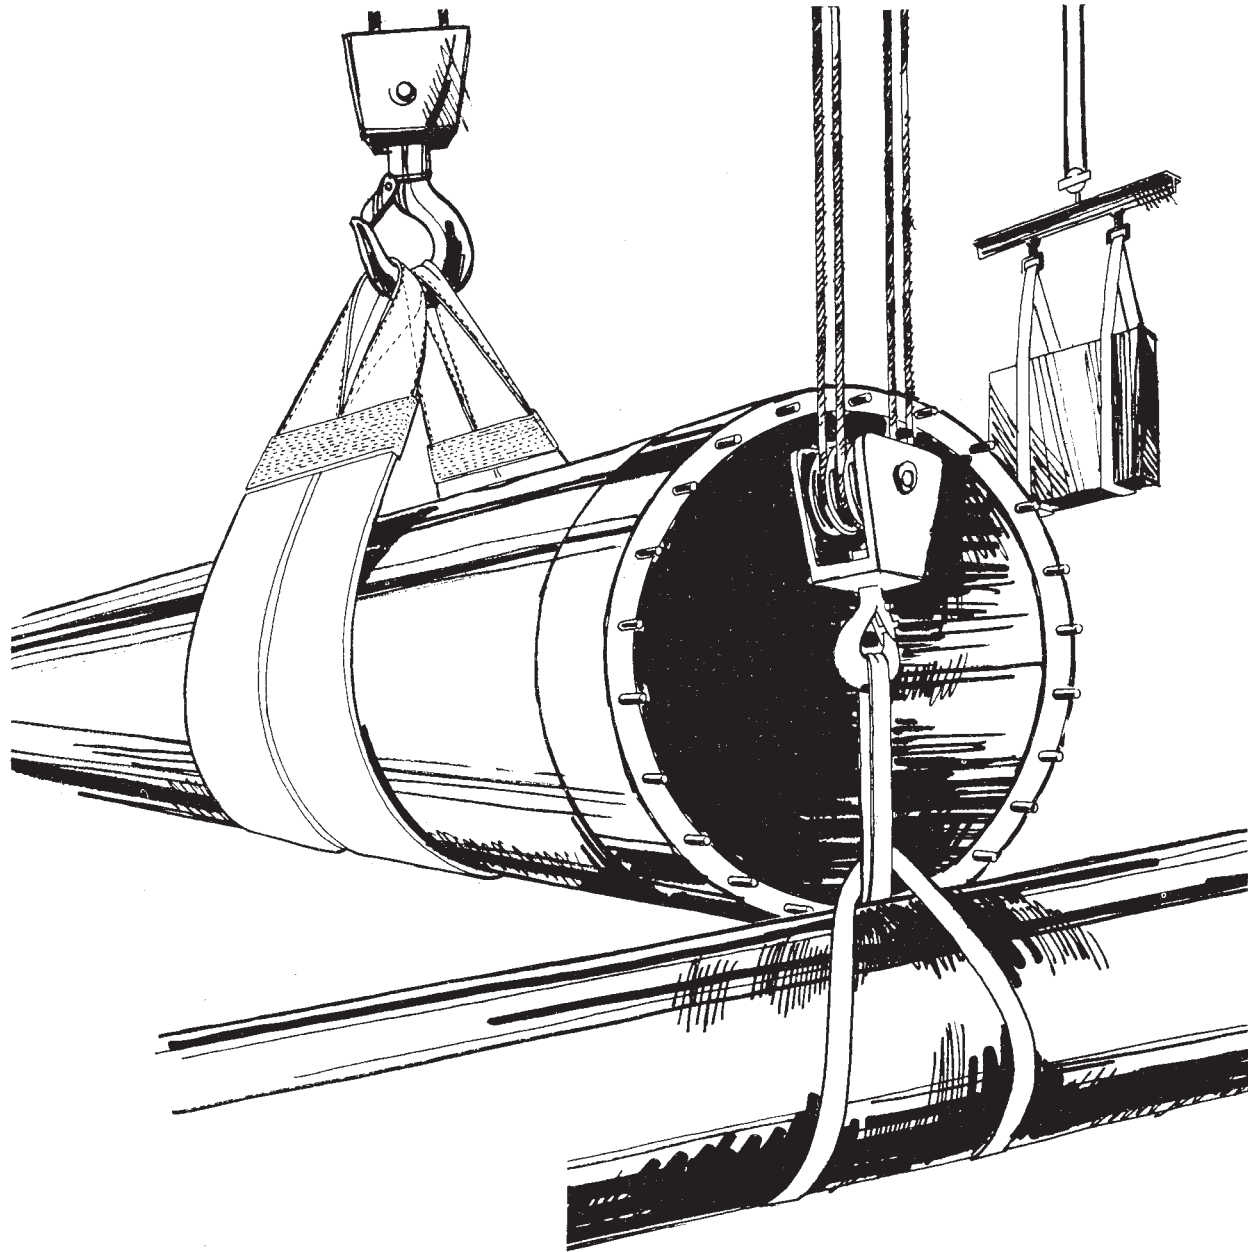

Nylon load lifting slings provide a 'soft' lift in a standard range of types to safely lift loads up to 19 tonne.

Special slings can be manufactured with capacities up to 100 tonne.

Slings available include single-webbing types in widths of 50, 100, 150, 200 and 300 mm and multi-webbing types with endless bodies having canvas protection or cross straps.









FLAT NYLON SLINGS

POLYESTER FLAT WOVEN WEBBING SLINGS

Flat Woven Webbing Slings are colour coded by safe mass load in accordance with international standard specifications.

The Flat Woven Webbing Sling safe mass loads listed in the chart below are for the **sewn component** and have a **factor of safety of 6 to 1** as required by the Driven Machinery Regulation 18 (10, c, ii) of the Machinery and Occupational Safety Act.

SAFE MASS LOAD IN KG

WEBBING SLING LIFTING CONFIGURATION									
Webbing Width	Colour Identification	SINGLE WEBBING				ENDLESS WEBBING			
		Straight Lift	Choked Lift	Parallel Basket	Basket at 90°	Straight Lift	Choked Lift	Parallel Basket	Basket at 90°
50 mm	Violet	1 000	800	2 000	1 400	2 000	1 600	4 000	2 800
75 mm	Pink	1 500	1 200	3 000	2 100	3 000	2 400	6 000	4 200
100 mm	Green	2 000	1 600	4 000	2 800	4 000	3 200	8 000	5 600
150 mm	Yellow	3 000	2 400	6 000	4 200	6 000	4 800	12 000	8 400
200 mm	Orange	4 000	3 200	8 000	5 600	8 000	6 400	16 000	11 200
250 mm	Orange	5 000	4 300	10 000	7 000	10 000	8 000	20 000	14 000
300 mm	Orange	6 000	4 800	12 000	8 400	12 000	9 600	24 000	16 800



Slings are also available with a range of metal end fittings and a wide variety of configurations to suit your needs.

If you have a special requirement, let us design a sling to suit your requirements.

ENDLESS ROUND NYLON SLINGS

ROUND SLINGS

Polyester Webbing Straps and Roundslings in accordance with ISO 4878

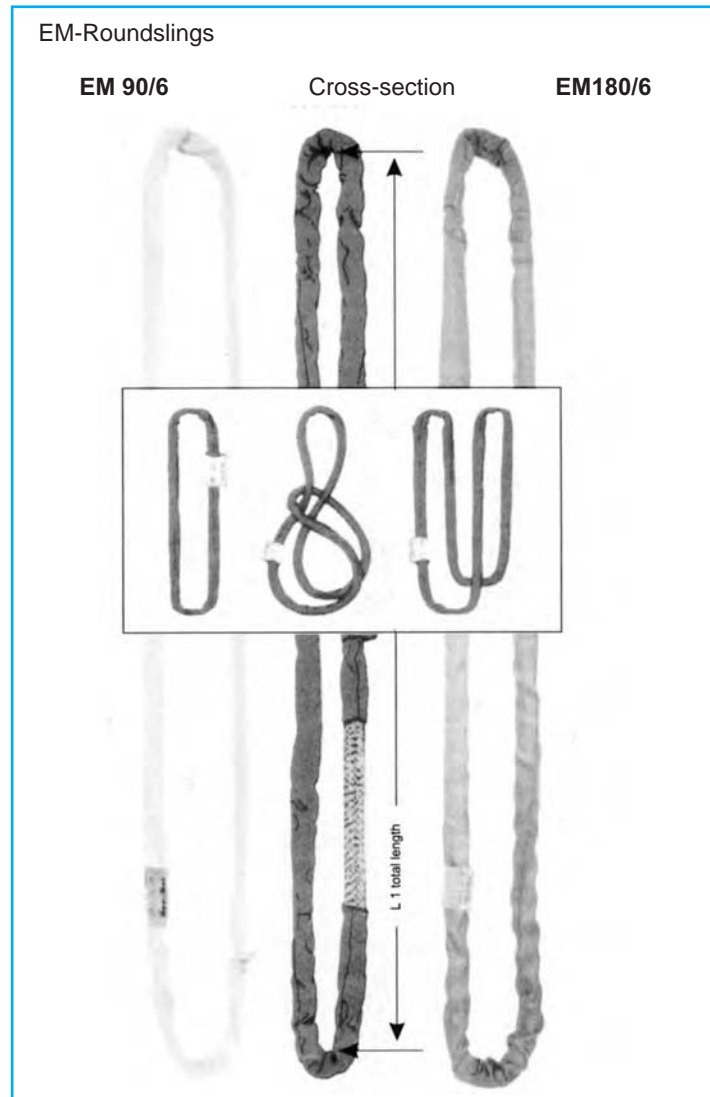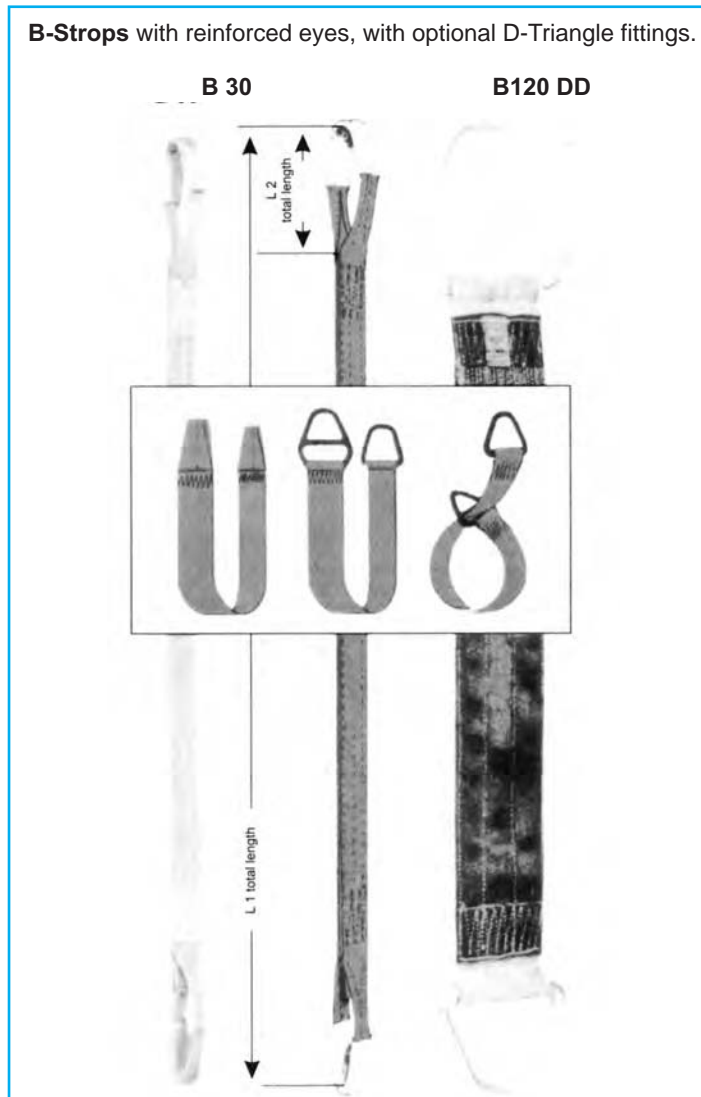

Order Ref.	B 30	B 80	B 120	B 30- DD	B 80- DD	B 120- DD
Working load limit (kg)	1 000	2 600	4 000	1 000	2 600	4 000
Colour Code	green	yellow	violet	green	yellow	violet
Webbing width (mm)	50	75	140	50	75	140
Webbing Thickness (mm)	4.2	5.2	5.6	4.2	5.2	5.6
Effective length L 1 min. (mm)	1 000	1 500	1 500	1 000	1 500	1 500

Order Ref.	EM 30	EM60	EM 90	EM 120	EM 180	EM 240
Working load limit (kg)	1 000	2 000	3 000	4 000	6 000	8 000
Colour Code	violet	green	yellow	red	lilac	blue
Surface unloaded (mm)	17	23	25	30	35	39
Surface loaded (mm)	36	45	48	53	56	69
Circumference min. (mm)	1 500	1 500	2 000	2 000	3 500	3 500


Strong as steel - light and flexible

FLAT NYLON SLINGS


FLAT NYLON SLINGS

Secutex Coated Straps

B-Straps with Secutex coating on both sides, with reinforced eyes, with optional D-Triangle fittings.
B 60-ST 21 **B120-DD-ST 21**

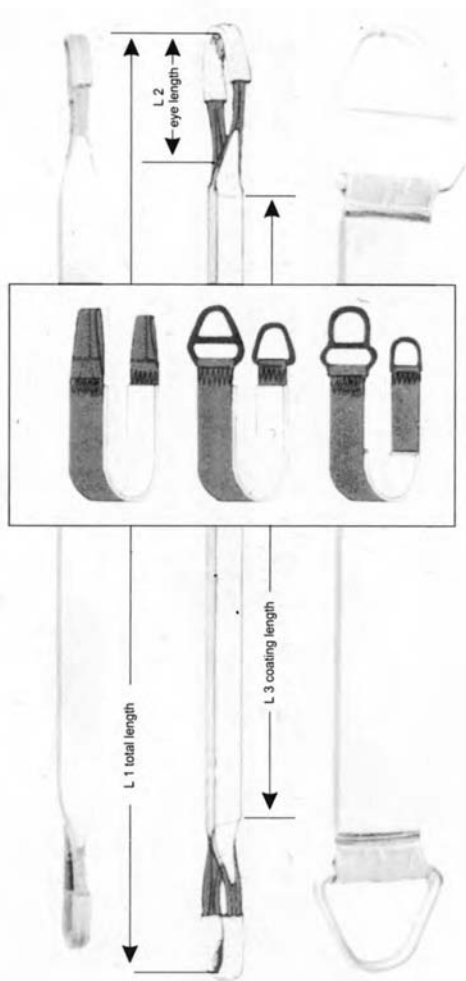

B-Straps with Secutex coating on both sides, with reinforced eyes, with optional D-Triangle fittings.
B 60-ST 22 **B120-DD-ST 22**

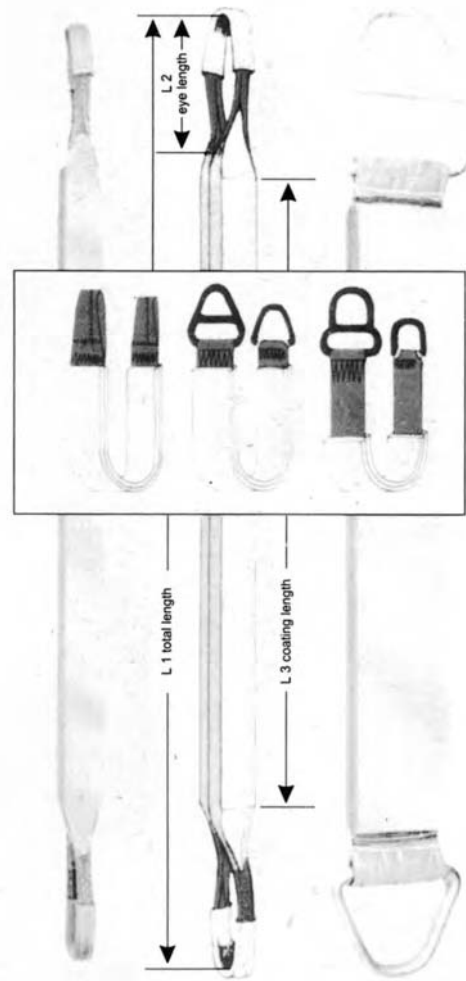

Order Ref.	B 60-ST 21	B 80 ST 21	B 120-ST 21	B 40-DD ST 21	B 80-DD ST 21	B 120-DD ST 21
Working load limit (kg)	2 000	2 600	4 000	2 000	2 600	4 000
Colour Code	red	yellow	violet	red	yellow	violet
Webbing width (mm)	60	85	150	150	85	150
Webbing Thickness (mm)	11.5	12	12	12	12	12
Effective length L 1 min. (mm)	2 000	2 500	2 500	2 600	2 500	2 600

Order Ref.	B 60 ST 22	B 80 ST 22	B 120 ST 22	B60-DD ST 22	B 80 DD ST 22	B 120-DD ST 22
Working load limit (kg)	2 000	2 600	4 000	2 000	2 600	4 000
Colour Code	red	yellow	violet	red	yellow	violet
Webbing Width (mm)	60	85	150	60	85	150
Webbing Thickness (mm)	16.5	17	17	16.5	17	17
Effective Length L 1 min. (Mm)	2 000	2 500	2 600	2 000	2 500	2 600

In our complete program we deliver webbing straps and roundslings from 250 - 25 000kg working load limit. Alternative lifting systems available on request.